

Ameritec

Fovea

Streaming Video Analyzer




- ▶ Fovea simulates hundreds of IPTV subscribers/Set Top Boxes (STBs) independently changing channels and watching video.
- ▶ Fovea GoldenEyes simultaneously monitor hundreds of Multicast IPTV streams in real-time, quantifying the Quality of Experience (QOE) per viewer.
- ▶ Fovea provides the industry's first Video Reception Index (VRI), a measurement that quantifies the effect of lost and corrupted video frames on the viewer.
- ▶ Fovea presents the following measurements per viewer endpoint:
 - ◆ MPEG Transport Stream (TS) packet metrics
 - ◆ RFC 4445, RFC 3550 and ETSI TR 101 290
 - ◆ Video I, P and B frame metrics and detail
 - ◆ Perceptual Quality measurements
 - ◆ Zap Times
- ▶ Fovea's simple GUI interface increases productivity by enabling the user to configure a test within minutes.

Just as audio Quality of Service (QoS) metrics were developed for voice communication's migration from traditional, fixed line networks to modern, internet-based networks, an identical need is occurring for video's migration to today's IPTV networks. It is no longer acceptable for a service provider to provide its customers with best-effort IP services. With competing suppliers offering IPTV services, only those suppliers providing the highest QoS/QoE will be able to minimize customer churn and meet the customers' expectations in terms of quality.


Ameritec's Fovea Streaming Video Analyzer is designed to measure the performance of today's IPTV networks. Fovea combines detailed packet-based metrics along with the industry's first Video Reception Index (VRI) that captures the user's experience in both lost or corrupted video frames and maximum corruption time. Hundreds of Fovea GoldenEyes can be configured to simulate hundreds of Set Top Box endpoints where video quality as well as video Zap Time is analyzed.

Each Fovea is equipped with the following capabilities:

- ◆ Two, 1GB Ethernet test ports
- ◆ Analysis of up to 500 MPEG Transport Streams
- ◆ Scriptable viewer actions
- ◆ TS packet statistics and ETSI TR 101 290 information
- ◆ MDI (RFC 4445) and jitter (RFC 3550) measurements
- ◆ Video frame statistics, GOP structure information and VRI
- ◆ Comprehensive Zap Time measurements
- ◆ Perceptual Quality metrics (MOS-V)

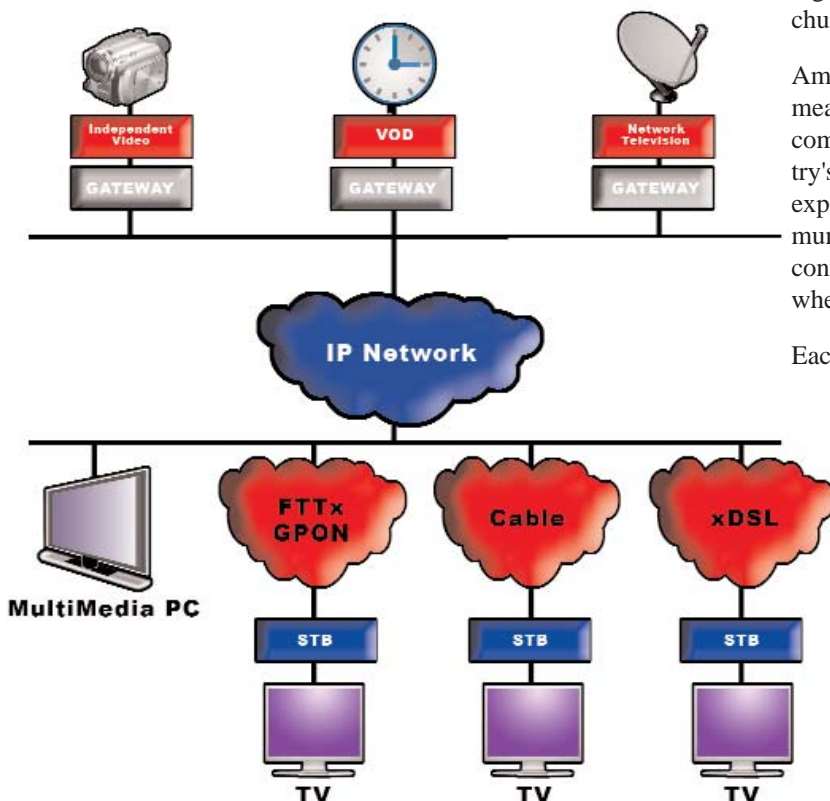

Fovea Applications



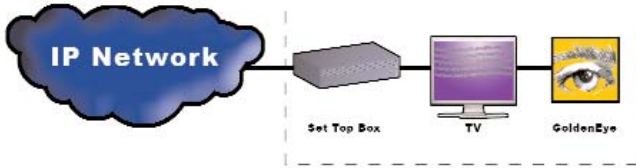


- ◆ Emulates STBs that can each receive multiple video streams in either UDP or RTP/UDP packets
- ◆ Each video stream is connected to a GoldenEye viewer to generate quality metrics
- ◆ Each virtual STB supports:
 - ▶ DHCP
 - ▶ Individual MAC address
 - ▶ Configurable IP address, VLAN ID and QnQ
 - ▶ IGMP v2 and v3

Applications

- ◆ Subscriber Behavior Simulation
- ◆ Set Top Box Emulation
- ◆ Access Network Testing
 - ▶ FTTx/GPON
 - ▶ xDSL
 - ▶ Cable
- ◆ Video Transport Network and Server Testing
- ◆ Customer Premises Equipment Testing
- ◆ Video Stream QoS/QoE Validation

IPTV (simplified)

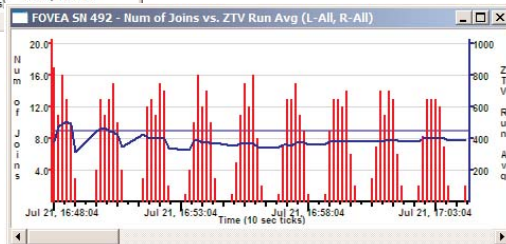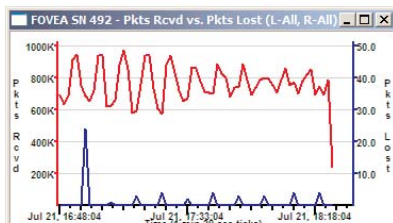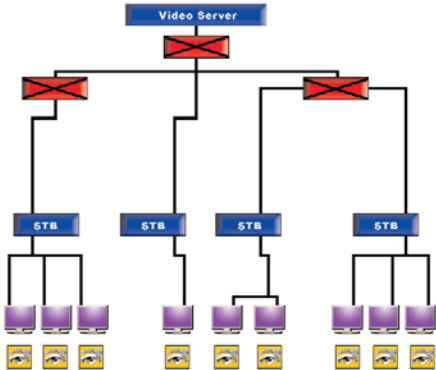

Operation

The Fovea product is essentially one or more Set Top Boxes and an associated viewer, or GoldenEye. Up to 500 GoldenEyes can be configured for each Fovea unit, where it would be possible to emulate a single Set Top Box with 500 GoldenEyes monitoring 500 unique TS streams or 500 Set Top Boxes monitoring a single TS stream or any combination in between. The Fovea utilizes Ameritec's Conductor graphical user interface that allows for easy data capture along with the ability to graph various metrics over time. A third-party video tool, such as VLC or mplayer, can be used to allow the developer to watch a specific TS stream while performing measurements.

Scripting

The Fovea is controlled in the same manner that a user would control a Set Top Box with a remote. Commands include Wait, Watch and Surf. Wait indicates the amount of time the user performs an action or non-action. Watch selects a particular video stream in which the measurements will be performed. Surf commands the Fovea to surf a range of channels so that Zap Times can be calculated. Virtual STBs operate either synchronously or "randomly". "Random" actions may be reproduced thus allowing a failure mode to be recreated.

Measurements

Ameritec has incorporated into Fovea a comprehensive set of measurements designed to best depict the user's experience as it pertains to video quality. Utilizing a standards based approach, Ameritec has incorporated ETSI TR101290, Media Delivery Index (RFC4445) and RFC3550 measurements as well as perceptual quality metrics such as MOS-V for each of the TS streams configured, up to a maximum of 500 streams. Additionally, Fovea provides a Video Reception Index measurement that captures two critical components of a video quality problem: (1) the percentage of bad frames and (2) the duration of the longest video degradation in seconds. Fovea also measures Zap Times. Zap Times Join and Leave measure the IGMP response of the network. Zap Time Presentation measures the earliest possible time that video can be displayed to the viewer. Zap Time Video is another measure of the video display time that considers the jitter buffer characteristics of the individual STBs.

Graphs


Fovea provides the user with the ability to graph any metric over the duration of the test. The user may choose to graph the metric over all Fovea STBs, an STB group, an individual STB or an individual Golden Eye. If an anomaly is seen in the report data or in the graph, the user may change the scale to zoom in and pinpoint its time of occurrence. Any two measurements may be presented on the same graph to allow correlation of results. Multiple graphs may be viewed simultaneously, providing further comparison and analysis capabilities. Fovea graphs may be used to assess system performance in real-time or as a tool for post-analysis of the data.

Performance

Fovea is designed to support hundreds of TS streams using its 1 GB Ethernet interface. Due to the differences in compression, high definition vs. standard definition video, etc., the number of TS streams that can be monitored will vary depending on the characteristics of each TS stream. Common configurations include up to:

- ◆ 500 standard definition, MPEG-4 (H.264) streams
- ◆ 500 standard definition, MPEG-2 streams
- ◆ 250 high definition (HD), MPEG-4 (h.264) streams
- ◆ 125 high definition (HD), MPEG-2 streams

Conductor

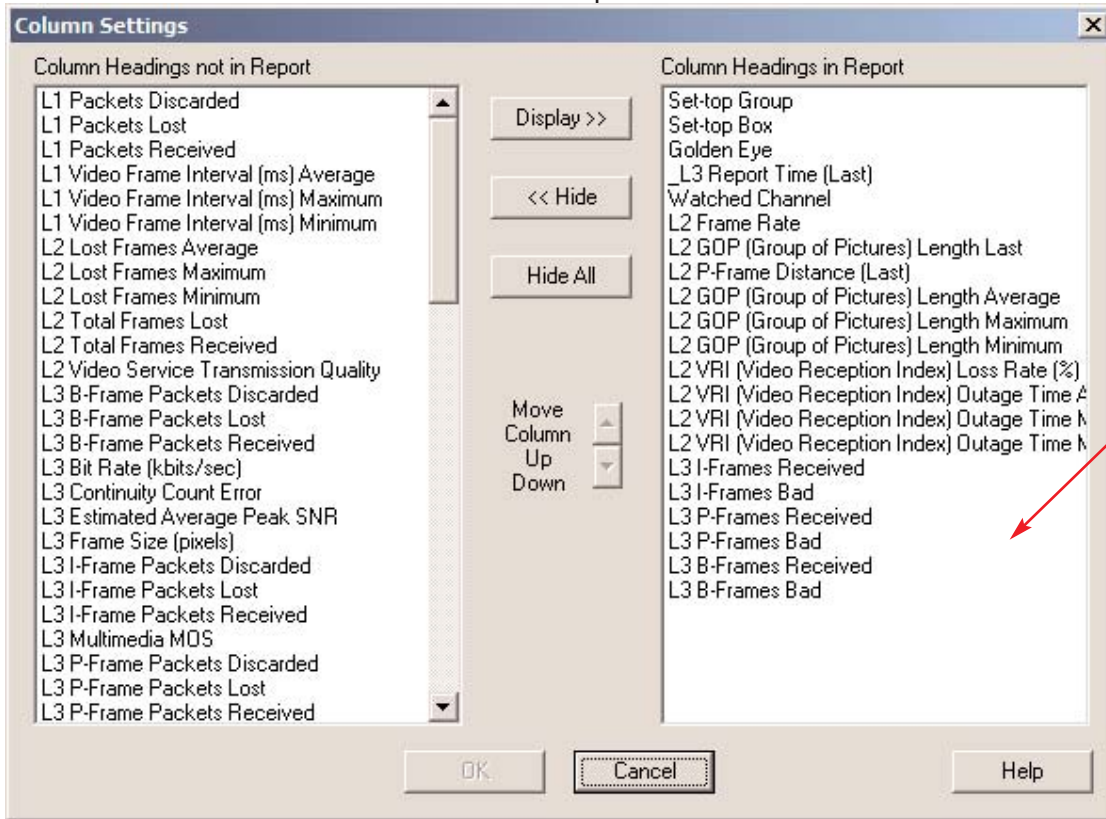

Customization of reports is possible by selecting fields from a comprehensive list of parameters.

Reports are generated that allow the user to sort on any measured parameter. Violations can be filtered to the top of the report so the user can quickly identify problematic channels. Current threshold violations are highlighted in red, while history violations are displayed as yellow.

2 Summary Last Watch (FOVEA SN 492 - 07/22/2008 11:49:46)

Report Columns Help



Report: 2 Summary Last Watch

Set Top Group	Set Top Box	Chan	Watch Time	Pkts Rcvd	Pkts Lost	Pkts Disc	PPDV	MDI LR Avg	MDI LR Max	MDI DF Avg	MDI DF Max	Ttl Frm Rcvd	Ttl Frm Crpt	VRI LR-F	VRI Out Min	VRI Out Avg	VRI Out Max	Num of Joins	ZTJ Last	ZTV Last
STG001	STB009	106	27	44,396	0	0	119	0.00	0.00	38.87	82.39	677	0	0.00	0.00	0.00	0.00	126	5	615
STG001	STB008	105	01:00	78,524	4	0	119	0.00	0.60	96.19	1,893.43	1,465	1	0.07	0.04	0.04	0.04	124	4	614
STG001	STB010	103	04	6,904	0	0	119	0.00	0.00	43.25	75.00	107	0	0.07	0.00	0.00	0.00	126	2	611
STG001	STB005	106	12	19,805	0	0	113	0.00	0.00	40.13	62.62	303	0	0.00	0.00	0.00	0.00	126	4	598
STG001	STB006	103	01:00	82,477	4	0	122	0.00	0.60	90.66	1,893.43	1,465	1	0.07	0.04	0.04	0.04	122	5	396
STG001	STB001	105	19	31,037	0	0	119	0.00	0.00	39.41	63.21	474	0	0.00	0.00	0.00	0.00	126	5	396
STG001	STB002	104	13	21,438	0	0	121	0.00	0.00	39.12	63.21	328	0	0.00	0.00	0.00	0.00	126	4	395
STG001	STB004	103	07	11,010	0	0	115	0.00	0.00	50.26	65.79	169	0	0.00	0.00	0.00	0.00	126	3	394
STG001	STB003	106	16	25,960	0	0	119	0.00	0.00	38.83	68.35	396	0	0.00	0.00	0.00	0.00	126	3	394
STG001	STB007	103	07	10,827	0	0	135	0.00	0.00	49.04	75.03	166	0	0.07	0.00	0.00	0.00	126	1	205

Conductor

Fovea can configure groups of Set Top Boxes or individual Set Top Boxes with unique scripts. This allows the developer to test the effects of synchronized channel changing to measure Zap Times or individual channel monitoring for video quality metrics.

Scripting language is clear and straight forward. Commands simulate a user selecting video channels similar to using a Set Top Box's remote control device.

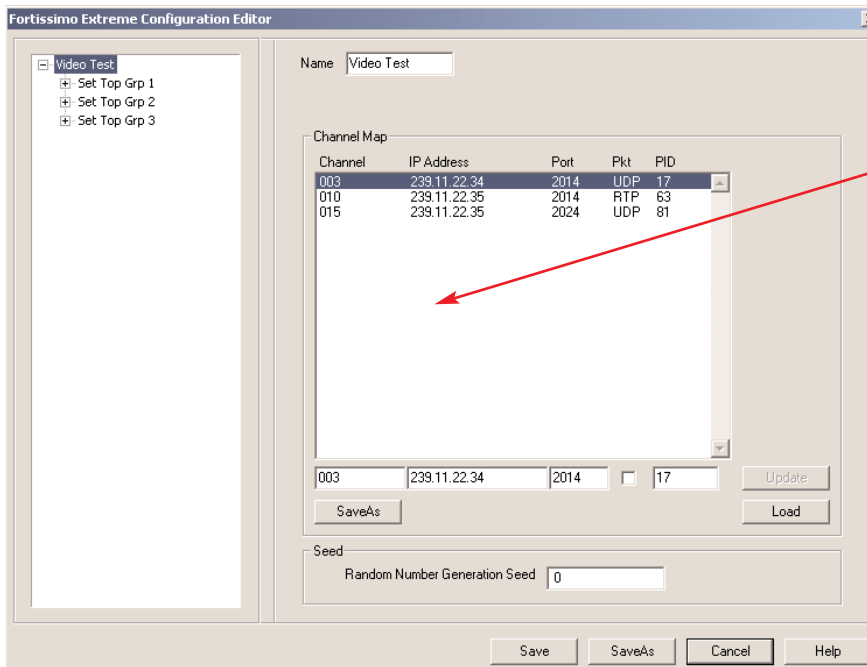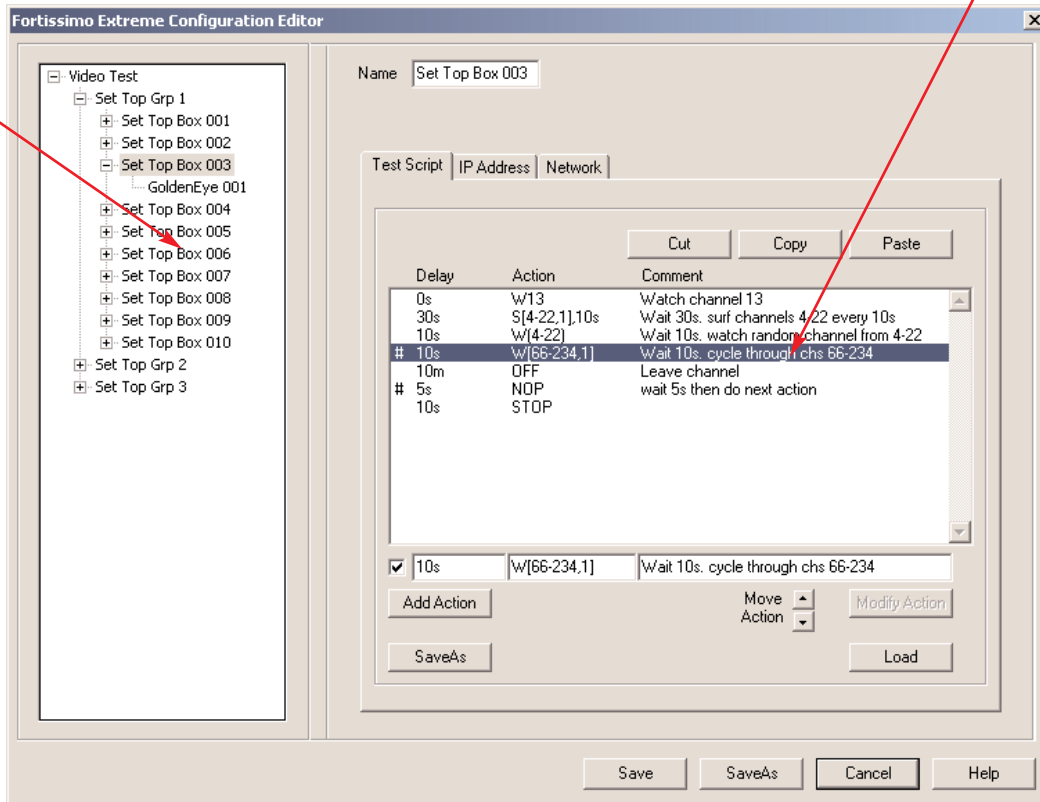

A channel mapping function is provided to configure IP address, RTP/UDP packet selection, port, etc.

General Characteristics

User Interface	Windows XP, Vista based GUI
Ethernet Port	One RJ45 connector and two LED indicators per network interface 10/100 BaseT interface Complies with IEEE 802.3

Dimensions

Power	90 - 264 VAC, 47 to 65 Hz
-------	---------------------------

Weight	18.5 Pounds (40.7 kg)
--------	-----------------------

Interface

Capacity	Two, 1 GB Ethernet (electrical) simultaneous monitoring of 500 streams
----------	--

Measurements

Quality Metrics	VSPQ MOS-V EPSNR Video Reception Index (VRI) Packet - Packet Delay Variation (PPDV)
JitterStatistics (RFC3550)	
Media Delivery Index (RFC4445)	Delay Factor Media Loss Rate
MPEG-2 Transport Statistics (ETSI TR101290)	TS Error State TS Sync Error Continuity Count Error Sync Byte Error Transport Error PCR Repetition Error PCR Discontinuity Error PTS Error
MPEG-2 Packet Statistics	Packets Received Packets Lost Packets Discarded % Packets Good
Video Frame Statistics	I - frame packets received I - frame packets lost I - frame packets discarded P - frame packets received P - frame packets lost P - frame packets discarded B - frame packets received B - frame packets lost B - frame packets discarded Video Frame received Video Frames Bad I - frames received I - frames impaired % I - frames Good P - frames received P - frames impaired % P - frames Good B - frames received B - frames impaired % P - frames Good GOP Detail Video Bit Rate Frame Rate Frame Size Video frame interval
Zap Time Statistics	Zap Time Leave Zap Time Join Zap Time Video Zap Time Presentation

Ordering Information

Mainframe/Chassis/Test Set	
Fovea	Fovea Streaming Video Analyzer

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its applications. Ameritec reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale. Please contact Ameritec for more information. Ameritec and the Ameritec logo are trademarks of Ameritec. Other trademarks are the property of their respective holders. © 2008 Ameritec. All rights reserved. 072208

NORTH AMERICA
TEL: 1 626 915 5441
FAX: +1 626 915 7181

WEBSITE: www.ameritec.com